




Grace BESS


Powering Tomorrow

Energy storage solutions for the world

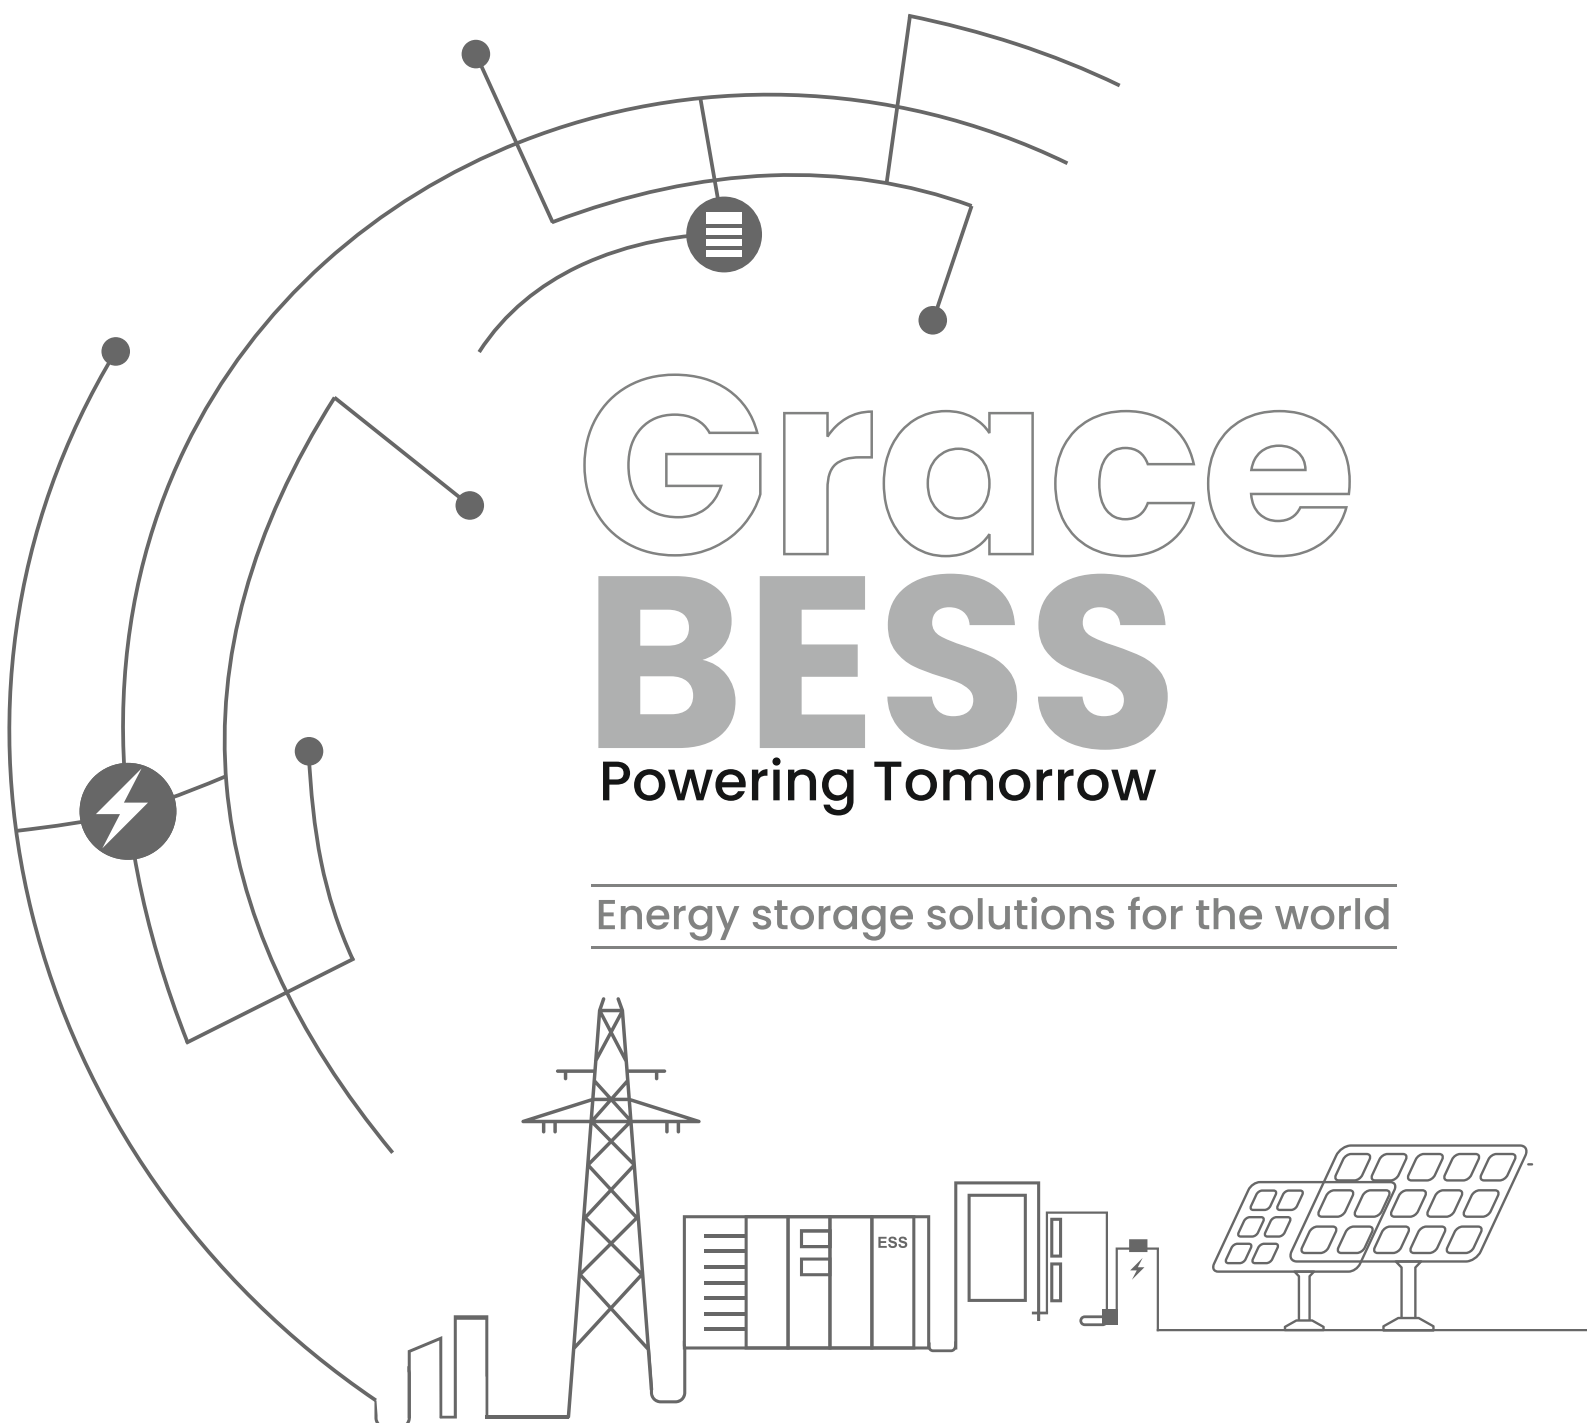

Content List

1	About Us	01
2	Residential ESS (All-IN-ONE-SOLUTIONS)	02
3	Low Voltage ESS Solutions	04
4	High Voltage ESS Solutions	06
5	Utility Scale ESS Solutions	08

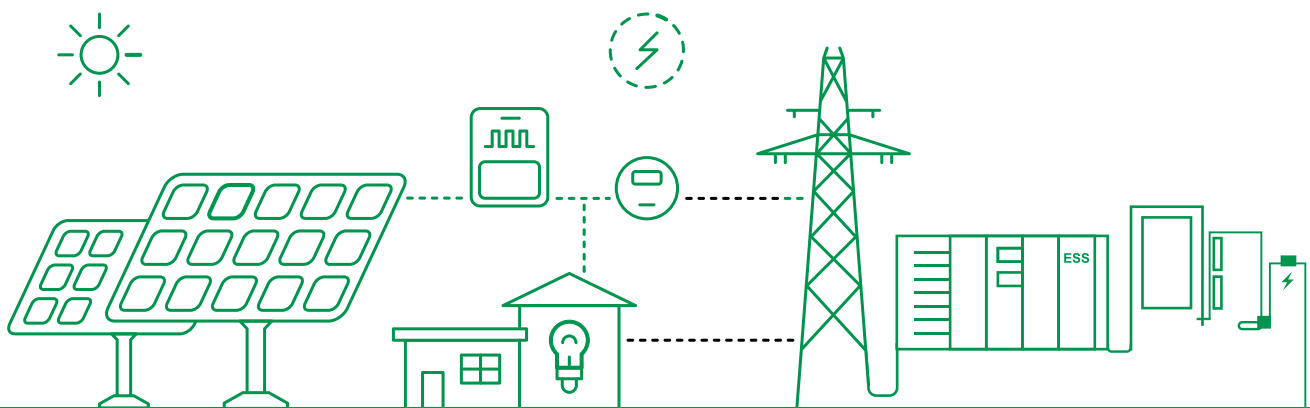



POWERING
tomorrow

About Us

For over a decade, we have been at the forefront of clean energy, delivering reliable solar solutions to homes and businesses. Building on this solid foundation, we have expanded our expertise to include advanced energy storage systems, bringing even greater independence, efficiency, and resilience to our customers' energy needs.

Our energy storage systems are designed to optimize solar power usage by storing excess energy for use anytime—day or night, rain or shine. This not only ensures reliable backup power but also maximizes the benefits of solar energy by reducing reliance on the grid. With our cutting-edge storage solutions, customers gain control over their energy, lower their carbon footprint, and enjoy uninterrupted power when it matters most.

RESIDENTIAL ESS SOLUTIONS

ALL-IN-ONE SOLUTION

1 – 30 kwh



PARALLEL



MODULAR



COMMUNICATION




OEM/ODM



02

Model	GRE48100		GRE48200	
Specification	48V100Ah	51. 2V100Ah	48V200Ah	51. 2V200Ah
Combination	15S1P	16S1P	15S1P	16S1P
Capacity	4.8KWh	5.12KWh	9.6KWh	10.24KWh
Standard discharge current	50A	50A	50A	50A
Max. discharge current	100A	100A	100A	100A
Working voltage range	40.5-54VDC	43.2-57.6VDC	40. 5-54VDC	43.2-57.6VDC
Standard Voltage	48VDC	51.2VDC	48VDC	51.2VDC
Max. charging current	50A	50A	100A	100A
Max. charging voltage	54V	57.6V	54V	57.6V
Cycle	3000~6000cycles @DOD 80%/25°C/0.5C			
Working humidity	65±20%RH			
Operating temperature	-10~+50°C			
Working altitude	≤2500m			
Cooling method	Natural cooling			
Installation	Stack installation			
Protection level	IP20			
Max of parallel	15PCS			
Warranty	5~10 Years			
Communication	Default: RS485/RS232/CAN Optional: WiFi/4G/Bluetooth			
Certified	CE ROHS FCC UN38.3 MSDS			
Product Size	400*200*460mm		400*240*460mm	
Package Size	460*230*545mm		460*270*545mm	
Net weight	50kg	53kg	102kg	106kg
Gross weight	55kg	58kg	112kg	116kg

*Voltage, capacity, size/color customization, OEM/ODM services can be provided according to customer needs

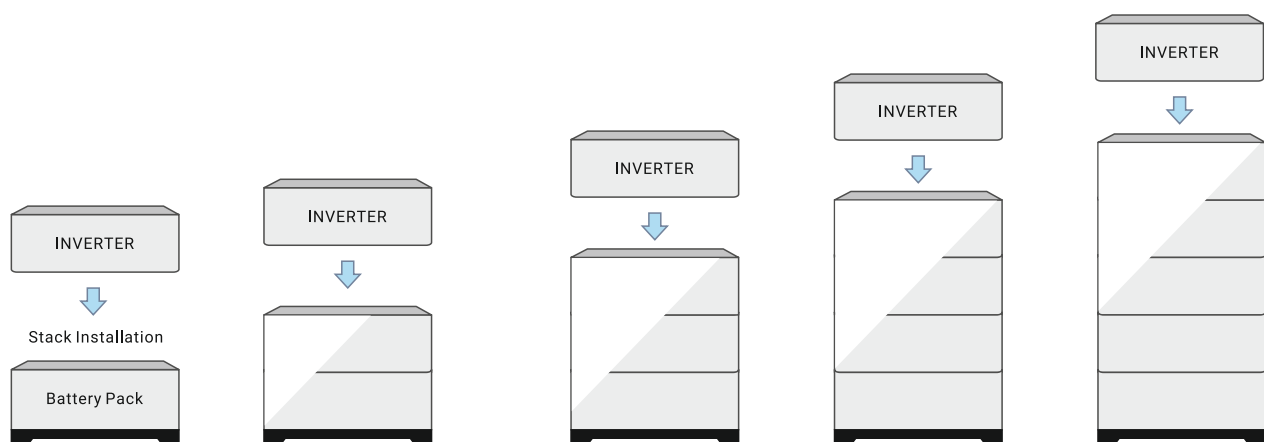

LOW VOLTAGE ESS SOLUTIONS

5kwh – 100kwh



PARALLEL



MODULAR



COMMUNICATION



OEM/ODM




Model	GRE4850		GRE48100		GRE48200	
Specification	48V50Ah	51. 2V50Ah	48V100Ah	51. 2V100Ah	48V200Ah	51. 2V200Ah
Combination	15S1P	16S1P	15S1P	16S1P	15S1P	16S1P
Capacity	2.4KWh	2.56KWh	4.8KWh	5.12KWh	9.6KWh	10.24KWh
Standard discharge current	50A	50A	50A	50A	50A	50A
Max. discharge current	100A	100A	100A	100A	100A	100A
Working voltage range	40.5-54VDC	43.2-57.6VDC	0. 5-54VDC	43.2-57.6VDC	40. 5-54VDC	43.2-57.6VDC
Standard Voltage	48VDC	51.2VDC	48VDC	51.2VDC	48VDC	51.2VDC
Max. charging current	50A	50A	50A	50A	100A	100A
Max. charging voltage	54V	57.6V	54V	57.6V	54V	57.6V
Cycle	3000~6000cycles @DOD 80%/25°C/0.5C					
Working humidity	65±20%RH					
Operating temperature	-10~+50°C					
Working altitude	≤2500m					
Cooling method	Natural cooling					
Installation	Cabinet/Rack Mount					
Protection level	IP20					
Max of parallel	15PCS					
Warranty	5~10 Years					
Communication	Default: RS485/RS232/CAN Optional: WiFi/4G/Bluetooth					
Certified	CE ROHS FCC UN38.3 MSDS					
Product Size	440*495*88mm		440*495*178mm		440*590*178mm	
Package Size	555*500*130mm		555*500*235mm		480*650*220mm	
Net weight	25kg	37kg	41kg	45kg	101kg	105kg
Gross weight	30kg	42kg	49kg	55kg	111kg	115kg

*Voltage, capacity, size/color customization, OEM/ODM services can be provided according to customer needs

Model	GRE96	GRE144	GRE192	GRE240
Specification	96V100AH	144V100AH	192V100AH	240V100AH
Capacity	9.6KWh	14.4KWh	19.2KWh	24KWh
Standard discharge current	50A~300A(Customer customize)			
Max discharge current	50A~500A(Customer customize)			
Working voltage range	81-108VDC	121.5-162VDC	162-216VDC	202.5-270VDC
Standard voltage	96V	144V	192V	240V
Max charging current	100A~500A(Customer customize)			
Max charging voltage	81~864V			
Cycle	3000~6000 Cycles @DOD 80%/25°C/0.5C			
Working humidity	65±20%RH			
Operating temperature	-10~+50°C			
Working altitude	≤2500m			
Cooling method	Natural cooling			
Installation	Cabinet/Rack Mount/Stack installation			
Protection level	IP20			
Max of parallel	15PCS			
Warranty	5~10Years			
Communication	Default: RS485/RS232/CAN Optional: WiFi/4G/Bluetooth			
Certified	CE ROHS FCC UN38.3 MSDS			

*Voltage, capacity, size/color customization, OEM/ODM services can be provided according to customer needs

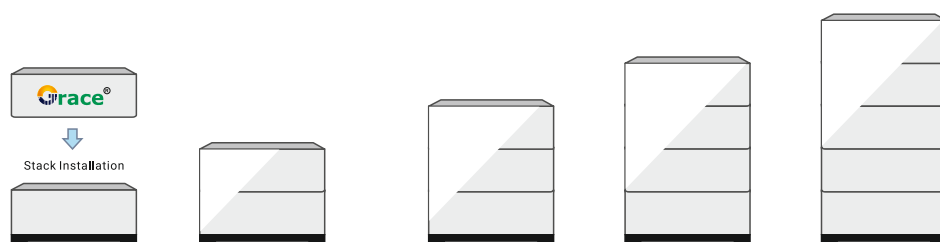

HIGH VOLTAGE ESS SOLUTIONS

30kwh – 1mwh



MODULAR



HIGH VOLTAGE
MATCHING



COMMUNICATION



INTELLIGENT



06

Product Model	GRE-EL372P2-DC	GRE-EL418P2-DC
Battery Side		
Cell Capacity	280Ah	314Ah
Cell Configuration	1P260S	
Nominal Voltage	1,331.2V	
Operating Voltage Range	1,164.8 - 1,497.6V	
Nominal Capacity	372.736kWh	417.997kWh
Supported Charge & Discharge Rate	≤ 0.5C	
Protection		
Overvoltage Protection	Yes	
Overcurrent Protection	Yes	
Short-circuit Protection	Yes	
Over-temperature Protection	Yes	
General Data		
Max. Efficiency	≥ 94% (Excluding self consumption)	
Operating Temperature Range	-20 to 50°C	
Operating Humidity Range	0 - 95%RH	
Noise	≤ 75dB	
Dimensions (W*H*D)	1420*2300*1350mm	
Weight	3,200kg	3,500kg
Protection Degree	IP55	
Cooling Method	Liquid Cooling	
Fire Protection Method	Perfluoro+Pack-level+Active Forewarning	
Max. Operating Altitude	≤ 2,000m	
Networking Mode	LAN	

Product Model	GRE-EL232P2-G1	GRE-EL261P2-G1
AC Side		
Nominal AC Active Power	105kW	125kW
Nominal AC Voltage	380 / 400V (-15% ~ 15%)	
Nominal AC Grid Frequency	50 / 60Hz (-2.5 ~ 2.5)	
AC Connection Method	3P+N+PE	
Max. Output Current	158A	212A
Adjustable Power Factor Range	0.99 / -1~1	
Max. Total Harmonic Distortion (THDi)	≤3%	
Efficiency Response Time	< 20ms	
Battery Side		
Cell Capacity	280Ah	314Ah
Cell Configuration	1P260S	
Nominal Voltage	832V	
Operating Voltage Range	728 ~ 936V	
Nominal Capacity	232.96kWh	261.248kWh
Supported Charge & Discharge Rate	≤ 0.5C	
Protection		
Overvoltage Protection	Yes	
Overcurrent Protection	Yes	
Short-circuit Protection	Yes	
Over-temperature Protection	Yes	
General Data		
Max. Efficiency	≥ 90% (Excluding self consumption)	
Operating Temperature Range	-20 to 50°C	
Operating Humidity Range	0 - 95%RH	
Noise	≤ 75dB	
Dimensions (W*H*D)	1000*2400*1350mm	
Weight	2,500kg	
Protection Degree	IP55	
Cooling Method	Liquid Cooling	
Fire Protection Method	Perfluoro+Pack-level+Active Forewarning	
Max. Operating Altitude	≤ 2,000m	
Networking Mode	WiFi / LAN / 4G	
Display	Touch Screen	

UTILITY SCALE ESS

1mwh – 5mwh



MODULAR



EASY O&M



COMMUNICATION



INTELLIGENT



08

Product Model	GRE-EL3000P2-DC	GRE-EL4000P2-DC	GRE-EL5000P2-DC
Battery Side			
Cell Capacity	280Ah	280Ah	314Ah
Cell Configuration	10P416S	12P416S	12P416S
Nominal Voltage	1,331.2V		
Operating Voltage Range	1,164.8 ~ 1,497.6V		
Nominal Capacity	3727.36kWh	4472.832kWh	5015.96kWh
Supported Charge & Discharge Rate	≤ 0.5C		
Protection			
Overvoltage Protection	Yes		
Overcurrent Protection	Yes		
Short-circuit Protection	Yes		
Over-temperature Protection	Yes		
General Data			
Max. Efficiency	≥ 94% (Excluding self consumption)		
Operating Temperature Range	-20 to 50°C		
Operating Humidity Range	0 ~ 95%RH		
Noise	≤ 75dB		
Dimensions (W*H*D)	2850*2896*6058mm	2850*2896*6800mm	2850*2896*6800mm
Weight	32T	42T	52T
Protection Degree	IP55		
Cooling Method	Liquid Cooling		
Fire Protection Method	Perfluoro+Pack-level+Active Forewarning		
Max. Operating Altitude	≤ 2,000m		
Networking Mode	LAN		





Website

Grace Renewable Energy Ltd.

404-406, Sarthik Square,
Nr. Pakwan Char Rasta, Bodakdev,
Ahmedabad - 380 054, (Guj.) India.

Images are subject to change without prior approval